



Sinepower has been developing and manufacturing 400Hz solid state Frequency Converters for more than a decade now.

Sinepower's GPU&DC units were designed with Power factor correction to guarantee a perfect sinusoidal input current from 25% to 150% load and a low THDi (<1.5%).

The 28VDC unit provides a solid-state GPU with a range of 300 to 600A continuous with a peak current of 1200A to 2000A respectively. Other values available upon request.

Sinepower ensure high quality, efficient and secure electrical power supplies.



## INPUT

- State of the art semiconductor technology (IGBT) Rectifier
- Power Factor Correction (PF=1)
- 95% efficiency
- 4 Quadrant Operation (better response of the system and safer operation for NBPT)
- Low input harmonics (<1.5% THDi), to comply with the strictest regulations @ 100% load.



## OUTPUT

- Voltage compensation (Load Dependent (optional) or via Remote Feedback – Real PLUG &PLAY connect GPU to aircraft and voltage compensation is done automatically, no user adjustment required or additional accessories)
- 4 Quadrant Operation (better response of the system and safer operation for NBPT)
- Vector control Inverter for better response and higher efficiency.



## NORMS AND STANDARDS

- AVIATION**
- ISO 6858 - Aircraft ground support electric supplies
  - SAE ARP 5015 - Ground equipment 400 Hz ground power performance requirement

- MILITAR**
- MIL-STD-704 - Aircraft electric power characteristics

- EMC**
- EN61000-6-4 - Electromagnetic compatibility - Generic emission standard
  - EN61000-6-2 - Generic immunity standard

- SAFETY**
- IEC 60529 - Degrees of protection provided by enclosures (IP Code)
  - IEC 62477-1 - Safety requirements for power electronic converter systems and equipment

- ENVIRONMENTAL**
- Dry heat test (steady state) IEC 60068-2-2:2007 subclause 5.3
  - Damp heat test IEC 60068-2-78:2012 subclause 6
  - Vibration test IEC 60068-2-6:2007 subclause 6
  - Salt mist test IEC 60068-2-52:1996 subclause 6
  - Dust and sand test Test Lc1 of IEC 60068-2-68



## EFFICIENCY

- Up to 95% - 30KVA to 45kVA @ load PF=0.8 to 1.0
- Green Standby Function - losses: 20 W
- No load losses: <1.5 kW.



## TECHNOLOGY (AC)

- Enclosure Protection class up to IP55
- No break power transfer compatibility (NBPT)
- Over/under voltage at output
- Regulator Overload protections set at:
  - 120% for 600 seconds
  - 150% for 60 seconds
  - 200% for 2 seconds
- Variable fan speed for internal temperature control
- Over temperature protection
- Short circuit proof by electric current limiting and shutdown
- 90% insertion detection



## TECHNOLOGY (DC)

- Over/under voltage at input
  - Under voltage <20V (4 sec)
  - Over voltage >34V (4 sec)
  - Short Circuit <5V (4 sec)
- Overload protections set at:
  - If 600A continuous - peak current 2000A for 5 seconds
- Over temperature protection.

# SPECIFICATIONS

## SINEGPU COMBI 30 & 45 KVA SOLID STATE 400HZ+28VDC GROUND POWER

### INPUT

- 3 phase 380V/400V/480V AC\* |  $\pm 10\%$
- 50/60Hz |  $\pm 10\%$

### AC

#### OUTPUT

- 3 phase 200V AC\* -400Hz |  $\pm 1\%$
- Overall Efficiency | Up to 95%
- Max. Crest Factor | 1.4:1

### RECTIFIER

- 4 Quadrant Operation
- AC Voltage Range | -10% +10%
- Efficiency | 95%
- Input Frequency Deviation | 10%
- Inrush Current | None

### INVERTER

- Static Regulation 0 - 100% load |  $\pm 1\%$
- Dynamic regulation 100% | 10%, recovering to 1% within 20ms
- Total harmonic distortion | Better than 3% (Linear Load)
- Electronic Limit Overload | 120% @ 600s; 150% @ 60s; 200% @ 5s\*\*
- Overload Capacity (IGBTs) | 150% Continuous
- Frequency stability |  $\pm 0.01\%$  Crystal Controlled
- Short circuit proof by electric current limiting and shutdown

### DC

#### OUTPUT

- Output 28.5VDC
- Continuous current capability (@28.5VDC) | 300A/600A/800A
- Maximum Current Limit (@28VDC) | 1200/2000A for up to 5sec
- Voltage regulation up to 600A |  $\pm 0.5\%$
- Ripple |  $< 0.5\%$
- Dynamic Recovery to 90% VDC |  $< 40\text{ms}$
- Voltage Compensation | 0-4V up to 600A (With remote feedback)
- Galvanic Isolation | 800Hz Transformer
- IGBT + DIODE Rectifier |  $< 0.5\%$

### ENVIRONMENTAL CONDITIONS


- Cooling | Forced air up to 40°C
- Ambient temperature (min/max) | -40°C to +40°C
- Relative humidity (min/max) | 0% to 90% without condensation
- Pollution degree | 2
- OVC (Overvoltage Category) | 3
- Altitude | Up to 2000m
- Sound power level |  $L_w \leq 65\text{dba}$  according to ISO 3747:2010

\* Other voltages and frequencies available on request

\*\* Other Electronic Overload limits available on request



# TECHNICAL DRAWING

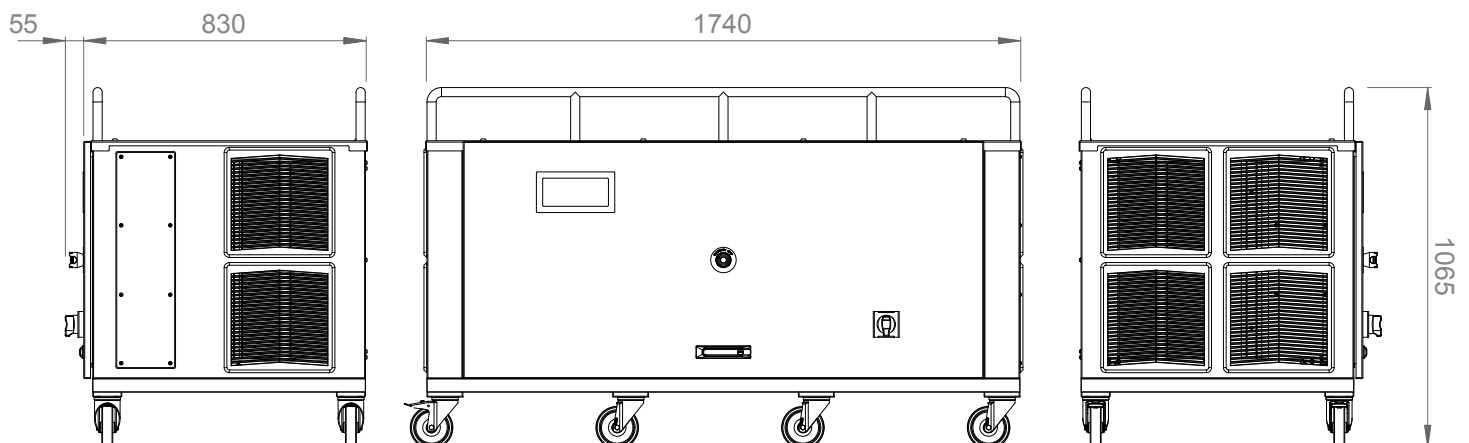

 **sinepower** Zona Industrial do Mamodeiro  
Rua Augusto Marques Branco, Lote 21-A  
3810-783 Aveiro, Portugal

Phone: +351 234 946 000  
Fax: +351 234 946 007  
GPS: N40°34'20", W8°33'48"

sinepower@sinepower.pt  
www.sinepower.com



Sinepower has been developing and manufacturing 400Hz solid state Frequency Converters for more than a decade now.

Sinepower's GPU&DC units were designed with Power factor correction to guarantee a perfect sinusoidal input current from 25% to 150% load and a low THDi (<1.5%).

The 28VDC unit provides a solid-state GPU with a range of 300 to 600A continuous with a peak current of 1200A to 2000A respectively. Other values available upon request.

Sinepower ensure high quality, efficient and secure electrical power supplies.



## INPUT

- State of the art semiconductor technology (IGBT) Rectifier
- Power Factor Correction (PF=1)
- 95% efficiency
- 4 Quadrant Operation (better response of the system and safer operation for NBPT)
- Low input harmonics (<1.5% THDi), to comply with the strictest regulations @ 100% load.



## OUTPUT

- Voltage compensation (Load Dependent (optional) or via Remote Feedback – Real PLUG &PLAY connect GPU to aircraft and voltage compensation is done automatically, no user adjustment required or additional accessories)
- 4 Quadrant Operation (better response of the system and safer operation for NBPT)
- Vector control Inverter for better response and higher efficiency.



## NORMS AND STANDARDS

- AVIATON**
- DFS400 - Specification for 400 Hz aircraft power
  - ISO 6858 - Aircraft ground support electric supplies
  - SAE ARP 5015 - Ground equipment 400 Hz ground power performance requirement

- MILITAR**
- MIL-STD-704 - Aircraft electric power characteristics

- EMC**
- EN61000-6-4 - Electromagnetic compatibility - Generic emission standard
  - EN61000-6-2 - Generic immunity standard

- SAFETY**
- IEC 60529 - Degrees of protection provided by enclosures (IP Code)
  - IEC 62477-1 - Safety requirements for power electronic converter systems and equipment

- ENVIRONMENTAL**
- Dry heat test (steady state) IEC 60068-2-2:2007 subclause 5.3
  - Damp heat test IEC 60068-2-78:2012 subclause 6
  - Vibration test IEC 60068-2-6:2007 subclause 6
  - Salt mist test IEC 60068-2-52:1996 subclause 6
  - Dust and sand test Test Lc1 of IEC 60068-2-68



## EFFICIENCY

- Up to 95% - 60KVA to 90kVA @ load PF=0.8 to 1.0
- Green Standby Function - losses: 20 W
- No load losses: <1.5 kW.



## TECHNOLOGY (AC)

- Enclosure Protection class up to IP55
- No break power transfer compatibility (NBPT)
- Over/under voltage at output
- Regulator Overload protections set at:
  - 120% for 600 seconds
  - 150% for 60 seconds
  - 200% for 2 seconds
- Variable fan speed for internal temperature control
- Over temperature protection
- Short circuit proof by electric current limiting and shutdown
- 90% insertion detection



## TECHNOLOGY (DC)

- Over/under voltage at input
  - Under voltage <20V (4 sec)
  - Over voltage >34V (4 sec)
  - Short Circuit <5V (4 sec)
- Overload protections set at:
  - If 600A continuous - peak current 2000A for 5 seconds
- Over temperature protection.

# SPECIFICATIONS

## SINEGPU COMBI 60 & 90 KVA SOLID STATE 400HZ+28VDC GROUND POWER UNIT

### INPUT

- 3 phase 380V/400V/415V AC\* |  $\pm 10\%$
- 50/60Hz |  $\pm 10\%$

### AC

#### OUTPUT

- 3 phase 200V AC\* -400Hz |  $\pm 1\%$
- Overall Efficiency | Up to 95%
- Max. Crest Factor | 1.4:1

### RECTIFIER

- 4 Quadrant Operation
- AC Voltage Range | -10% +10%
- Efficiency | 95%
- Input Frequency Deviation | 10%
- Inrush Current | None

### INVERTER

- Static Regulation 0 - 100% load |  $\pm 1\%$
- Dynamic regulation 100% | 10%, recovering to 1% within 20ms
- Total harmonic distortion | Better than 3% (Linear Load)
- Electronic Limit Overload | 120% @ 60s; 150% @ 60s; 200% @ 5s\*\*
- Overload Capacity (IGBTs) | 150% Continuous
- Frequency stability |  $\pm 0.01\%$  Crystal Controlled
- Short circuit proof by electric current limiting and shutdown

### DC

#### OUTPUT

- Output 28.5VDC
- Continuous current capability (@28.5VDC) | 300A/600A/800A
- Maximum Current Limit (@28VDC) | 1200/2000A for up to 5sec
- Voltage regulation up to 600A |  $\pm 0.5\%$
- Ripple |  $< 0.5\%$
- Dynamic Recovery to 90% VDC |  $< 40\text{ms}$
- Voltage Compensation | 0-4V up to 600A (With remote feedback)
- Galvanic Isolation | 800Hz Transformer
- IGBT + DIODE Rectifier |  $< 0.5\%$

### ENVIRONMENTAL CONDITIONS


- Cooling | Forced air up to 40°C
- Ambient temperature (min/max) | -40°C to +40°C
- Relative humidity (min/max) | 0% to 90% without condensation
- Pollution degree | 2
- OVC (Overvoltage Category) | 3
- Altitude | Up to 2000m
- Sound power level |  $L_w \leq 65\text{dba}$  according to ISO 3747:2010

\* Other voltages and frequencies available on request

\*\* Other Electronic Overload limits available on request



# TECHNICAL DRAWING

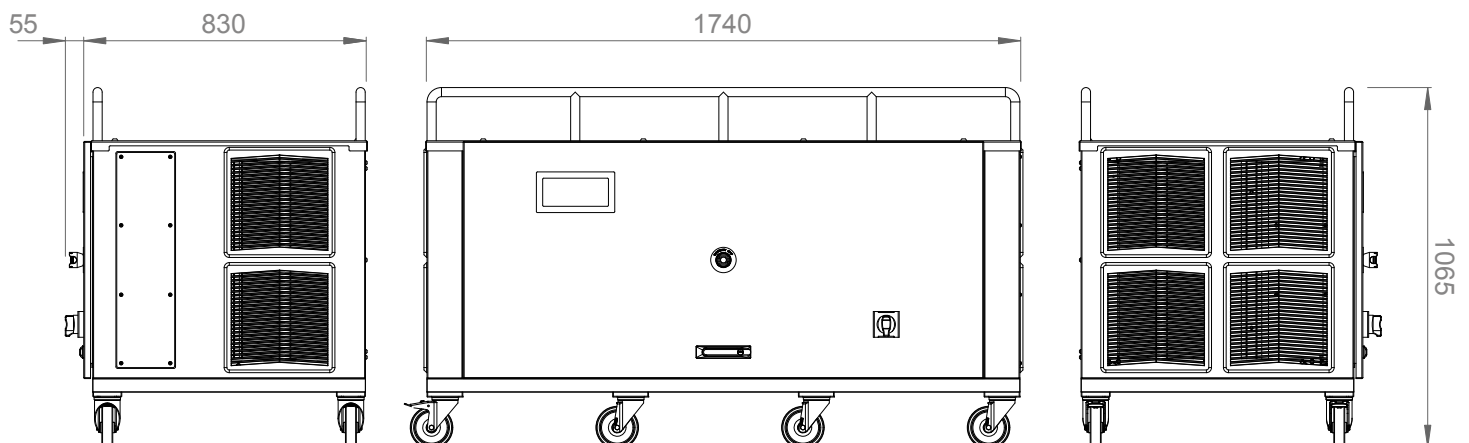

 **sinepower** Zona Industrial do Mamodeiro  
Rua Augusto Marques Branco, Lote 21-A  
3810-783 Aveiro, Portugal

Phone: +351 234 946 000  
Fax: +351 234 946 007  
GPS: N40°34'20", W8°33'48"

sinepower@sinepower.pt  
www.sinepower.com